


BPW SL air suspension. SLO and SLU series.


Axle loads up to 5,500 kg.

Air-sprung axles and axle units	Trailing arm	Bracket (ST) (mm)*	Air bag	Axle type Drum brake 300 x 100	Ride height (FH) (mm)	Axle type Drum brake 420 x 120	Ride height (FH) (mm)	Axle type Disc brake SB 3308	Ride height (FH) (mm)
---------------------------------	--------------	--------------------	---------	--------------------------------------	-----------------------	--------------------------------------	-----------------------	------------------------------------	-----------------------

SLO series

	1 x 46	184	30 K	NRS NRZ NRDZ NRB	365 - 395	RS RB	365 - 395	SNRS SNRZ	365 - 395
	1 x 46	268	30 K	NRS NRZ NRDZ NRB	395 - 445	RS RB	395 - 445	SNRS SNRZ	395 - 445
	1 x 46	268	30	NRS NRZ NRDZ NRB	425 - 480	RS RB	425 - 480	SNRS SNRZ	425 - 480

SLU series

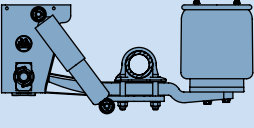	1 x 46	184	30 K	NRS NRZ NRDZ NRB	170 - 230	RS RB	170 - 230		
	1 x 46	268	30 K	NRS NRZ NRDZ NRB	215 - 265	RS RB	215 - 265	SNRS SNRZ	215 - 265
	1 x 46	268	30	NRS NRZ NRDZ NRB	240 - 320	RS RB	240 - 320	SNRS SNRZ	240 - 320

*Only bracket ST 268 mm and air bag 30 K.

SL air suspension

NR axle series

- 4,000 kg / 5,500 kg axle load with twin wheels (9" to 19.5")
- 5,500 kg with 0 offset and single wheels (15" to 19.5")
- 5,500 kg with offset > 0 (B-hub) and 15" to 19.5" tyres
- Brake size 300 mm x 100 mm
- Axle beam Ø 101.6 mm

R axle series


- 5,500 kg axle load
- Single wheels from 19.5" bis 22.5" with 0 offset
- B-hub version (120 - 154 offset) for 20" to 22.5" tyres
- Brake size 420 mm x 120 mm
- Axle beam Ø 101.6 mm

SNR axle series

- 5,500 kg axle load with single and double wheels (17.5" to 19.5")
- Disc brake SB 3308
- Axle beam Ø 101.6 mm



SLO single-leaf

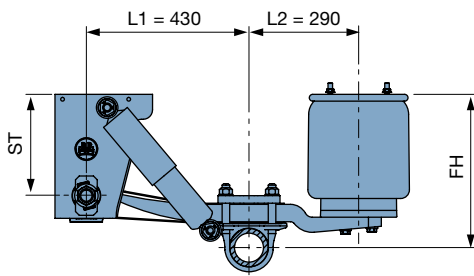

SLU single-leaf

